


632

FOAM MOUNTING TAPE

Venture Tape 632 is a 31.25 mil (0.8mm) double coated polyethylene foam tape designed for mounting, sealing, gasketing, and sound and vibration damping applications. The highly conformable foam, coupled with a high performance rubber adhesive, creates a reliable bond on a wide variety of high and low energy surfaces, providing optimum performance and durability.

Product Construction

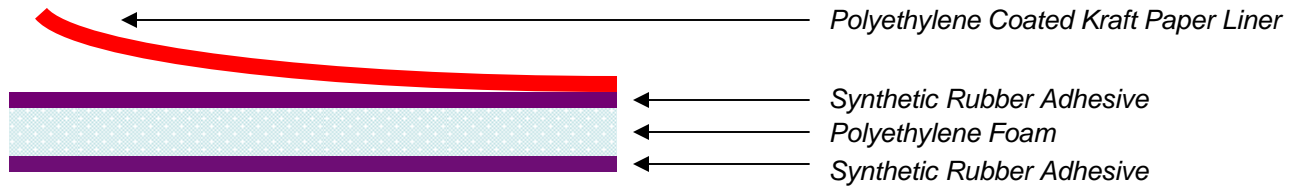

Features & Benefits

- Aggressive, high tack rubber adhesive performs well on a wide variety of materials and surfaces
- Easy die cutting is ideal for nameplate mounting applications
- Medium density polyethylene foam combines easy installation with superior impact resistance
- Provides a strong, durable bond on smooth and irregular surfaces
- High conformability is ideal for most interior and exterior automotive applications
- Excellent temperature resistance and humidity performance

Test	Typical Value	Typical Value (Metric)	Test Method
Total Product Thickness	35.8 mils	0.9 mm	PSTC-133
Thickness (Exposed Adhesive)	2.3 mils	57.2 µm	PSTC-133
Thickness (Carrier)	31.3 mils	0.8 mm	PSTC-133
Thickness (Liner Adhesive)	2.3 mils	57.2 µm	PSTC-133
Thickness (Liner)	4.7 mils	119.4 µm	PSTC-133
Peel Adhesion (Exposed Adhesive)	100 oz/in	27.8 N/25mm	PSTC-101
Peel Adhesion (Liner Adhesive)	100 oz/in	27.8 N/25mm	PSTC-101
Shear Strength (Exposed Adhesive)	>76 hours	>76 hours	PSTC-107
Shear Strength (Liner Adhesive)	>76 hours	>76 hours	PSTC-107
Tensile Strength	6.0 lb/in width	27 N/25mm width	PSTC-131
Elongation	300 %	300 %	PSTC-131
Minimum Application Temperature	50 °F	10 °C	
Maximum Continuous Temperature	175 °F	79 °C	
Maximum Intermitant Temperature	220 °F	104 °C	

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- Available in black and white
- Standard roll sizes and custom rolls available on request
- Slit rolls: minimum width 0.25"
- Liner options: contact Venture Tape for available liners

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

www.venturetape.com

www.boma.it

VentureTape®



USA

Venture Tape Corp.
30 Commerce Road
Rockland, MA 02370
781-331-5900
FAX 781-871-0065

Europe – BOMA

BOMA s.r.l.
Via Aquileia 22/30
34070 Villesse (GO)
Italy
0481 96431 1
FAX 0481 91440

Europe – Venture Tape

Venture Tape Europe Corp.
Units 5 – 6, Faraday Close,
Drayton Fields, Daventry,
Northamptonshire, England NN11 8RD
(0) 1327 876555
FAX (0) 1327 876444

Australasia

Venture Tape Australasia, Pty., Ltd.
90A Northgate Drive
Thomastown 3074 Victoria
Australia
(03) 9464 2089
FAX (03) 9464 7268